


DBD: EN207 Certified. Luminous transmittance: 22% Amber.

λ [nm]	L-Rating	λ [nm]	OD
190-315	D LB7 + IR LB3	190-534	7+
>315-532	D LB5 + IRM LB7	760-1090	5+
760-<770 + >1075-1085	DIR LB5	790-850	7+
770-<800 + 820-960	DIRM LB6	>850-960	6+
>1064-1075	DIRM LB6	>960-1070	7+
800-820 + >960-1064	D LB6 + IRM LB7		

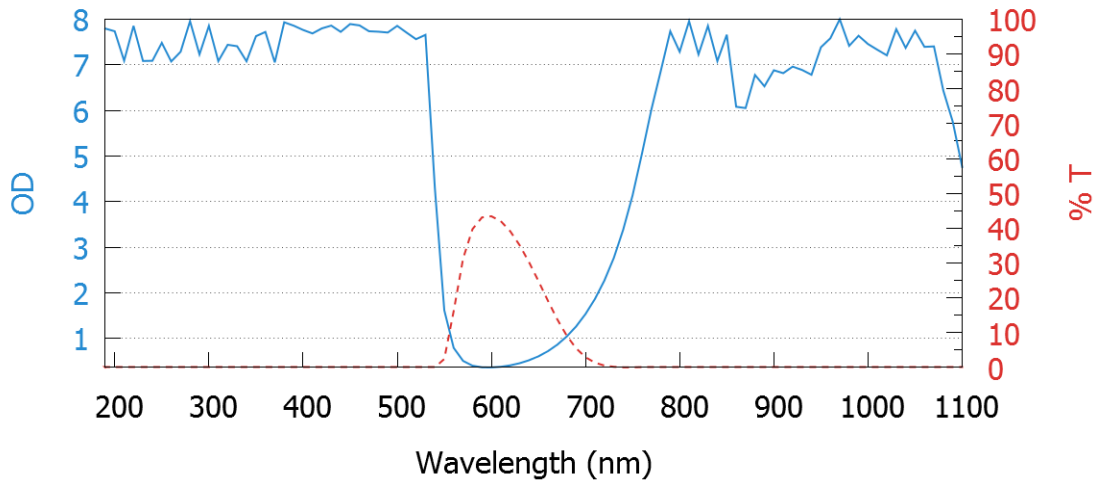

DBY: EN207 Certified. Luminous transmittance: 35% Amber.

λ [nm]	L-Rating	λ [nm]	OD
180–315	D LB7 + R LB4	190–534	7+
>315–534	D LB5 + IRM LB6	850–925	5+
850–925	DIRM LB5	925–1070	6+
>925–980	D LB5 + IRM LB6	960–1064	7+
>980–1064	D LB6 + IRM LB7		
>1064–1085	DIRM LB5		

