






## 均匀线激光器 LDLY20102 规格书

型号:	LDLY20102	光型:	均匀一字线
输出波长:	405nm 450nm 488nm 520nm 635nm 650nm	输出功率:	3~100mW
发散扇角:	10~110° (可选)	直线度:	≥1/5000
线宽 0.3M 处:	0.01mm	线宽 0.5M 处:	0.02mm
工作电压:	DC3V DC5V DC12V DC24V	工作电流:	100~150mA
光学系统:	光学玻璃 G3	工作模式:	CW / TTL (可选)
工作温度:	-10~40℃	贮藏温度:	-40~85℃
功率稳定性:	<5%	使用寿命:	≥10000H
外形尺寸:	∅20×102mm	激光等级:	IIIB
外壳材质:	航空铝黑色氧化 (可根据要求定制)	附件:	工业支架 专用电源

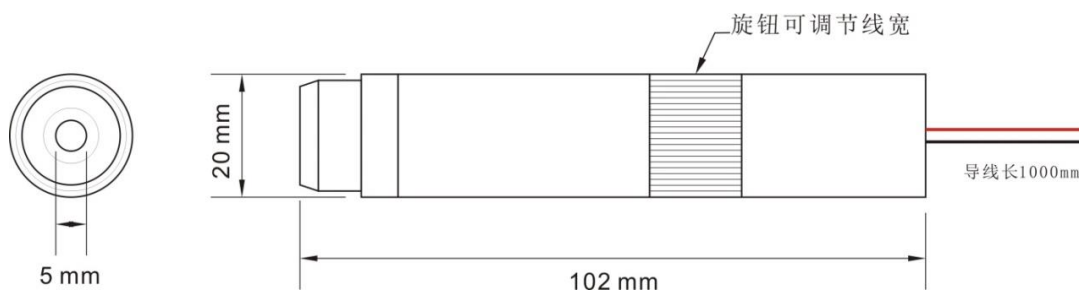


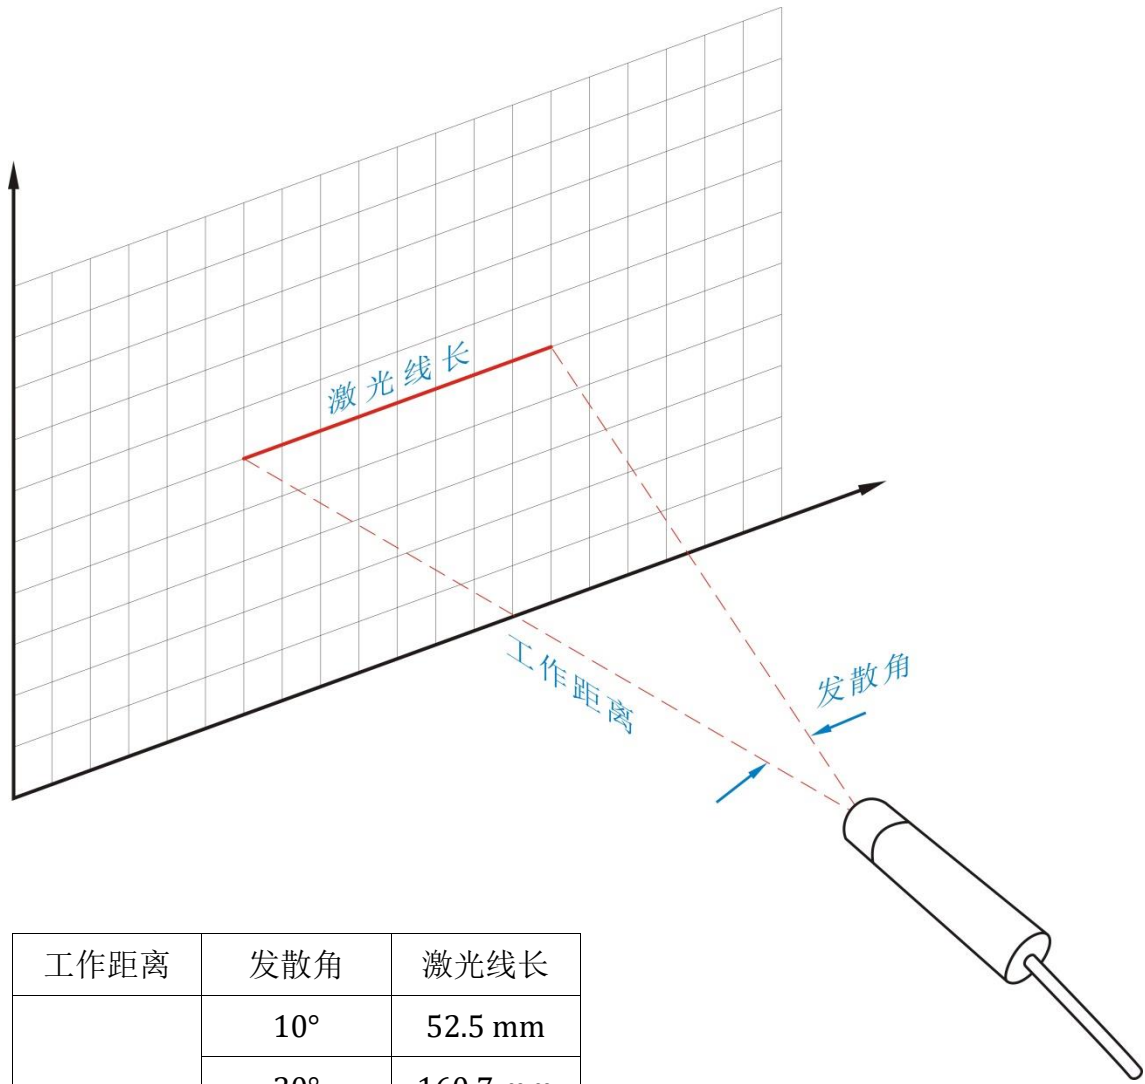


工作距离	发散角	激光线长
300 mm	10°	52.5 mm
	30°	160.7 mm
	45°	248.5 mm
	60°	346 mm
	90°	600 mm
	110°	860 mm

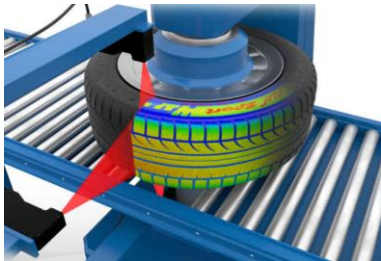

3D 扫描

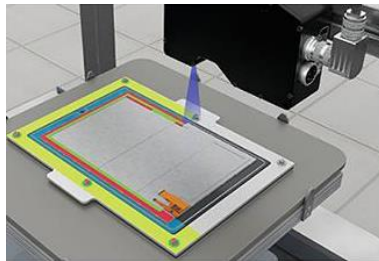

机器视觉

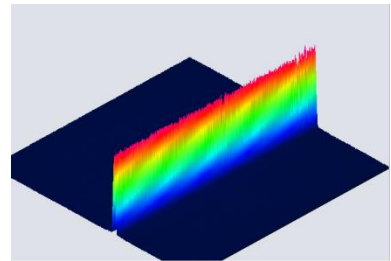

工业检测